DATA OUTPUT

NON-ROTATING SPINDLE

DIGITAL BLADE MICROMETERS

- Measure the groove diameter of shafts and keyways
- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Supplied with setting standards (except 0-25mm/0-1")
- Power:
  with data interface: CR2032
  built-in wireless: rechargeable lithium battery



3532-25A

With data interface (optional wireless transmitter code 7315-31, receiver is needed page 8) (mm)

Code	Range	Type	Accuracy	L	b
3532-25A	0-25mm/0-1"	A	±4μm	57	32
3532-50A	25-50mm/1-2"	A	±4μm	82	44.5
3532-75A	50-75mm/2-3"	A	±5μm	107	57
3532-100A	75-100mm/3-4"	A	±5μm	132.6	69.5
3532-125A	100-125mm/4-5"	A	±6μm	158	82
3532-150A	125-150mm/5-6"	A	±6μm	183.4	94.5
3532-175A	150-175mm/6-7"	A	±7μm	208.8	107
3532-200A	175-200mm/7-8"	A	±7μm	234.2	129.6
3532-225A	200-225mm/8-9"	A	±8μm	259.6	142.3
3532-250A	225-250mm/9-10"	A	±8μm	285	155
3532-275A	250-275mm/10-11"	A	±9μm	310.4	167.7
3532-300A	275-300mm/10-12"	A	±9μm	336.5	177.8
3532-25BA	0-25mm/0-1"	B	±4μm	57	32
3532-50BA	25-50mm/1-2"	B	±4μm	82	44.5
3532-75BA	50-75mm/2-3"	B	±5μm	107	57
3532-100BA	75-100mm/3-4"	B	±5μm	132.6	69.5
3532-125BA	100-125mm/4-5"	B	±6μm	158	82
3532-150BA	125-150mm/5-6"	B	±6μm	183.4	94.5
3532-175BA	150-175mm/6-7"	B	±7μm	208.8	107
3532-200BA	175-200mm/7-8"	B	±7μm	234.2	129.6
3532-225BA	200-225mm/8-9"	B	±8μm	259.6	142.3
3532-250BA	225-250mm/9-10"	B	±8μm	285	155
3532-275BA	250-275mm/10-11"	B	±9μm	310.4	167.7
3532-300BA	275-300mm/10-12"	B	±9μm	336.5	177.8



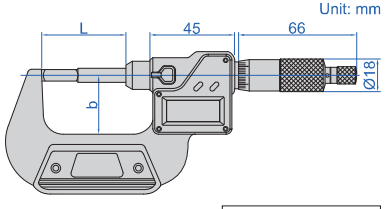

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code
3532-□□□□WL

Code examples:

Original code	Wireless code
3532-25A	3532-25AWL
3532-25BA	3532-25BAWL

